


**24 VOLT PX-616, PX-619
S# 07053264-UP**

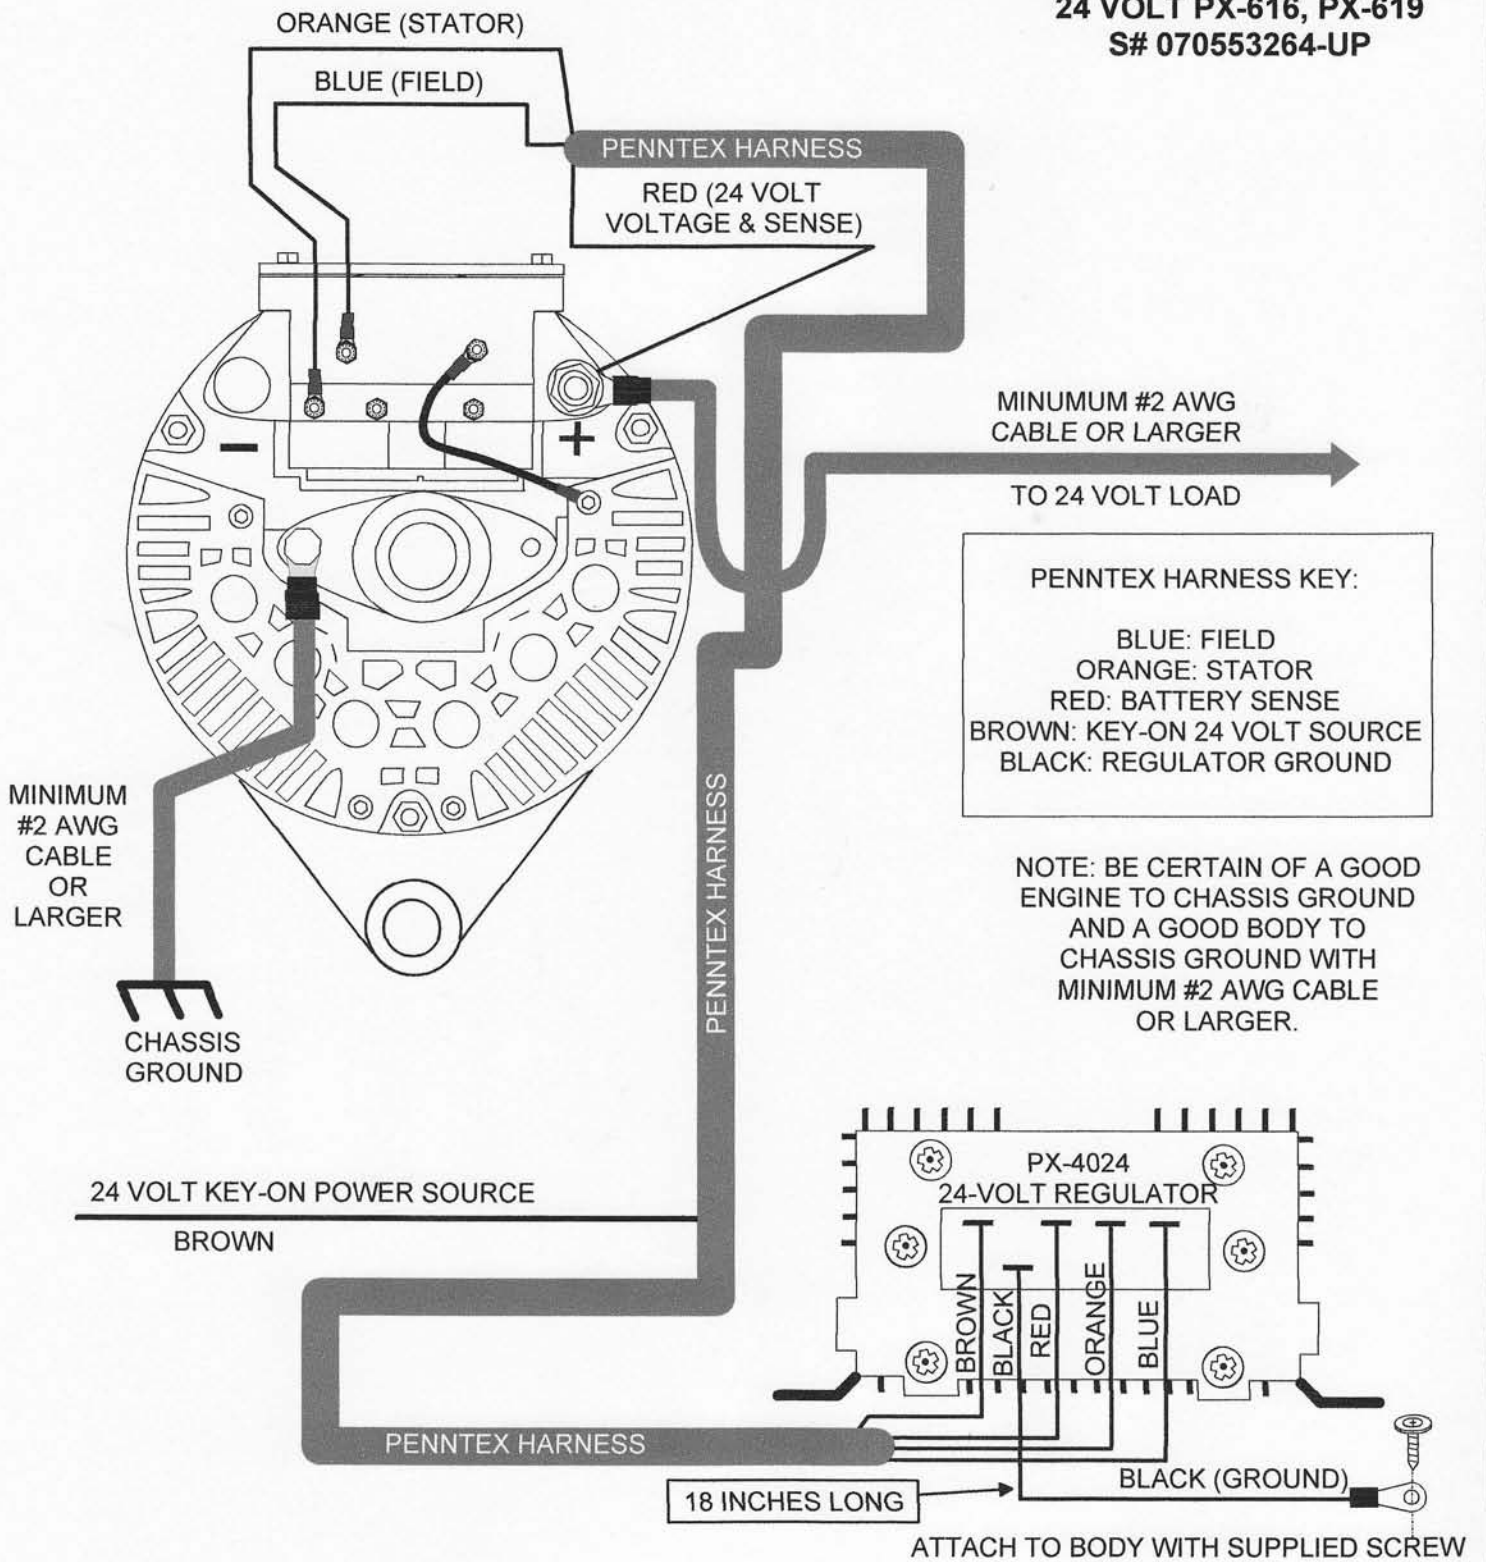

PENNTEX HARNESS KEY:

BLUE: FIELD
 ORANGE: STATOR
 RED: BATTERY SENSE
 BROWN: KEY-ON 24 VOLT SOURCE
 BLACK: REGULATOR GROUND

NOTE: BE CERTAIN OF A GOOD ENGINE TO CHASSIS GROUND AND A GOOD BODY TO CHASSIS GROUND WITH MINIMUM #2 AWG CABLE OR LARGER.

NOTES:
 THIS IS A GENERIC WIRING SCHEMATIC FOR A 24 VOLT SYSTEM USING A PX-6-160 OR PX-6-190 WITH A PX-4024 REGULATOR. THIS DIAGRAM IS NOT SPECIFIC TO ANY CERTAIN MAKE, MODEL, OR ENGINE.
 CHARGING SYSTEM CABLE SIZE: MINIMUM #2 AWG OR LARGER

PennTex
INDUSTRIES, INC.
 FT. WORTH, TX MANCHESTER, PA
 877-590-7366 penntexusa.com

TITLE/DESC. 24 VOLT SYSTEM WITH A PX-6-160 OR PX-6-190 ALTERNATOR		
DATE: 03-18-14	DRAWING NUMBER: PD-238	REVISION #
DRAWN BY: DMC	UPDATED BY:	UPDATE DATE:
SCALE: NONE		PAGE: 1 OF 1